

FIG. 1 is a perspective view of a device 100 in a closed position. The device 100 includes a frame 102 and a cover 104. The cover 104 is hinged to the frame 102 at a hinge 106. The hinge 106 includes a first hinge member 108 and a second hinge member 110. The first hinge member 108 is connected to the frame 102 and the second hinge member 110 is connected to the cover 104. The cover 104 is shown in a closed position, covering the frame 102. The device 100 is shown in a perspective view, with the frame 102 and cover 104 being rectangular. The hinge 106 is located at one end of the frame 102 and cover 104. The first hinge member 108 and second hinge member 110 are shown in a perspective view, with the first hinge member 108 being a cylindrical member and the second hinge member 110 being a cylindrical member. The device 100 is shown in a perspective view, with the frame 102 and cover 104 being rectangular. The hinge 106 is located at one end of the frame 102 and cover 104. The first hinge member 108 and second hinge member 110 are shown in a perspective view, with the first hinge member 108 being a cylindrical member and the second hinge member 110 being a cylindrical member.

1/3

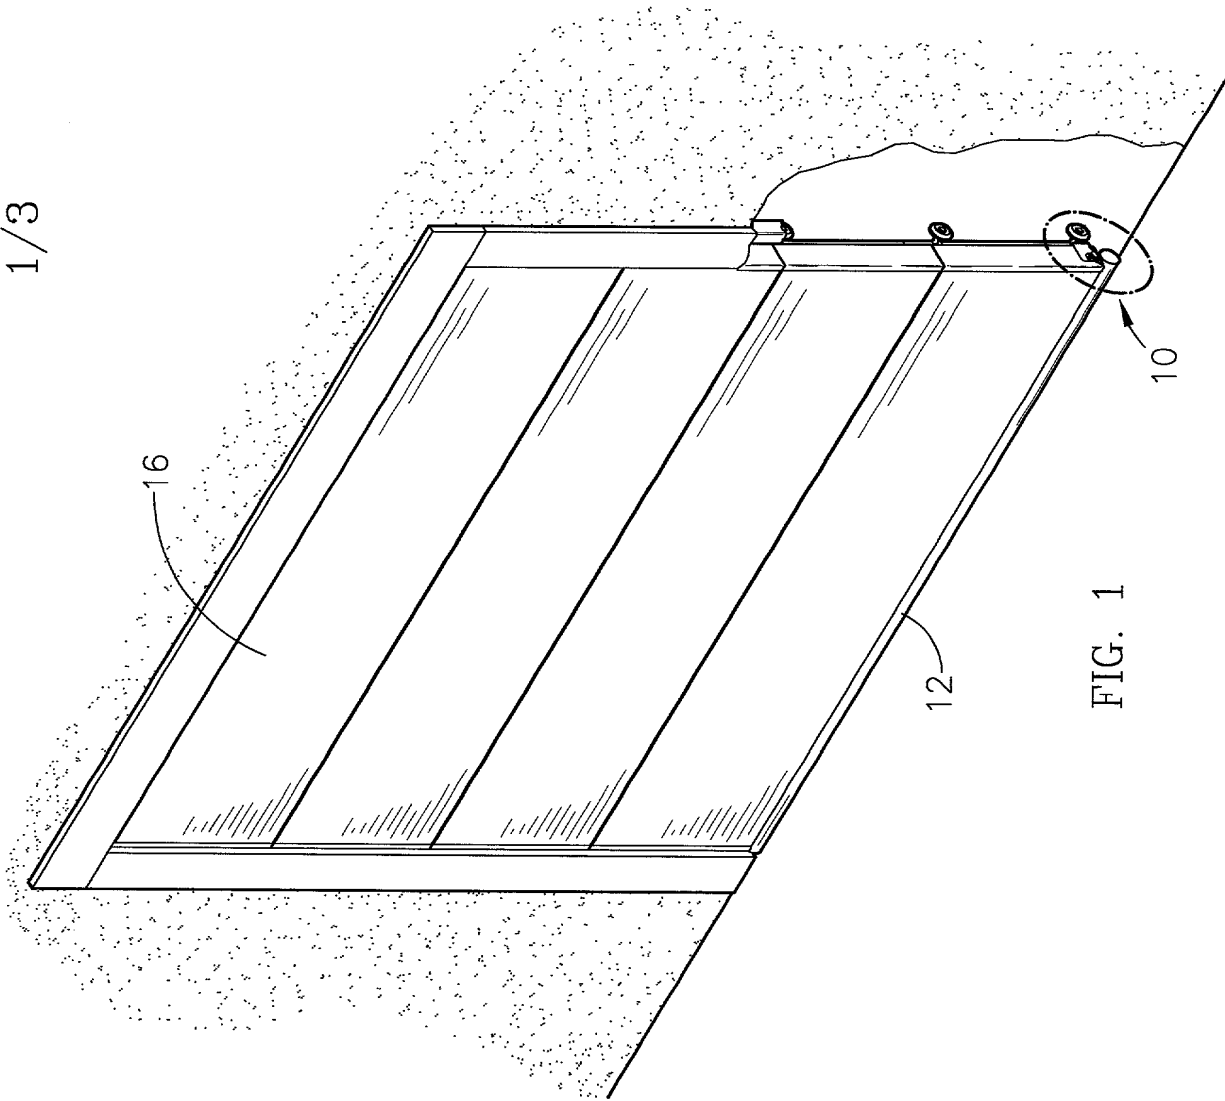


FIG. 1

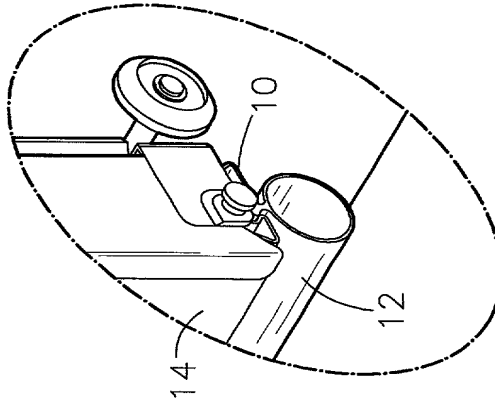


FIG. 2

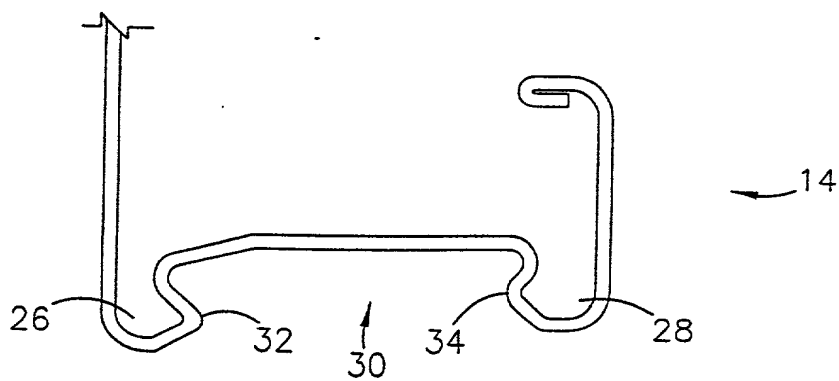


FIG. 4

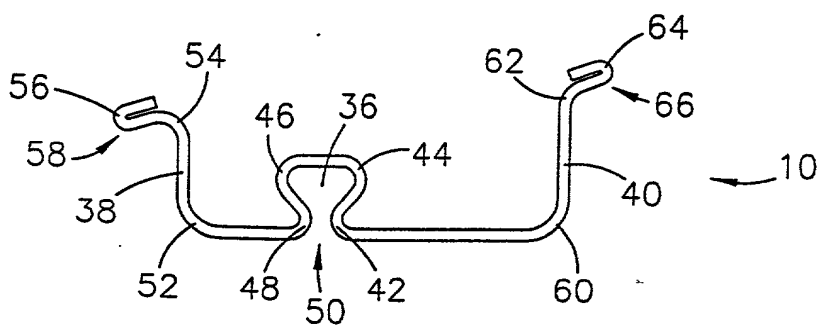


FIG. 6

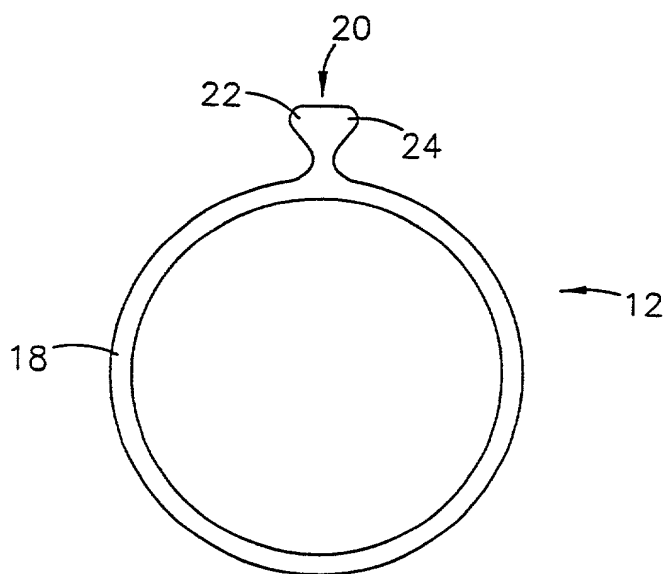


FIG. 3

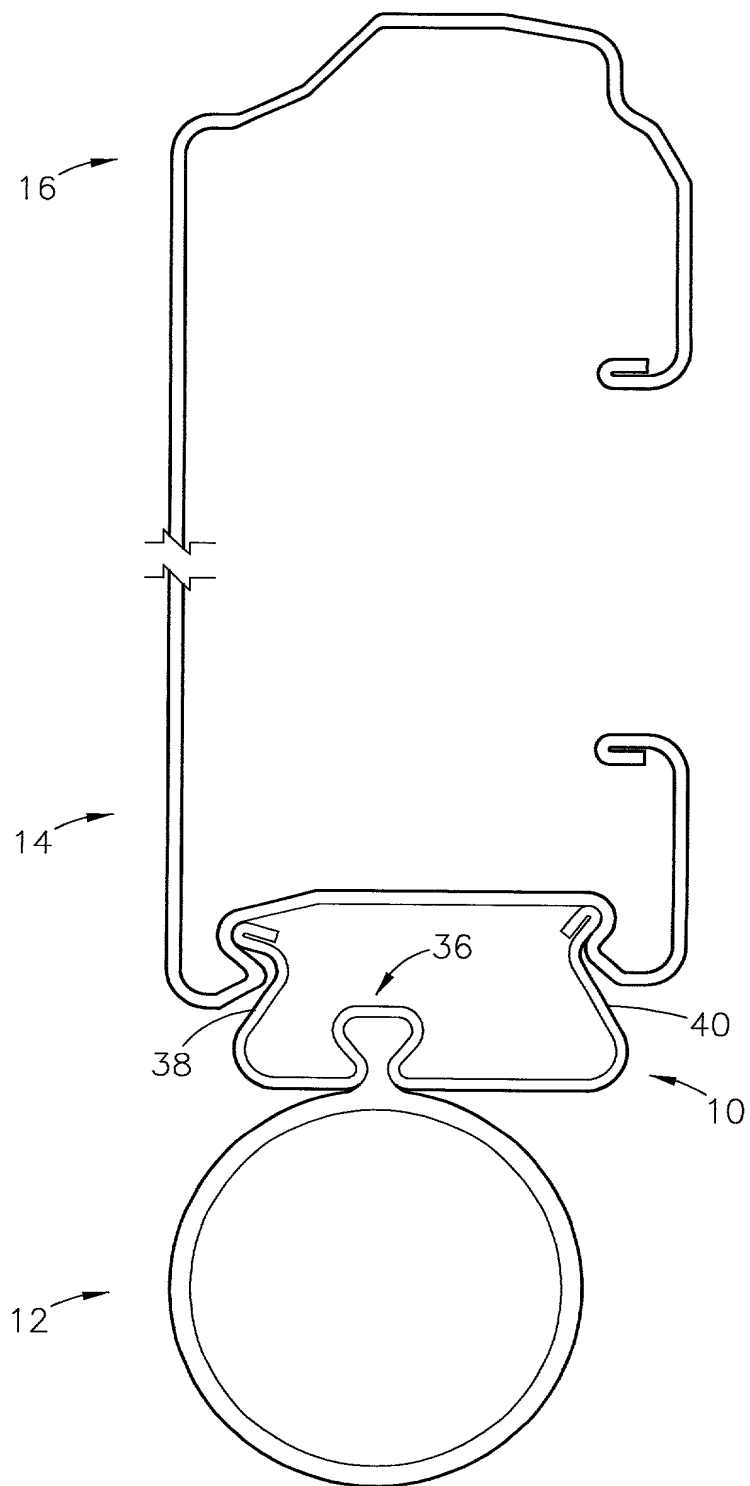


FIG. 5